


K50-CP

C POWER

MARINE GENSET

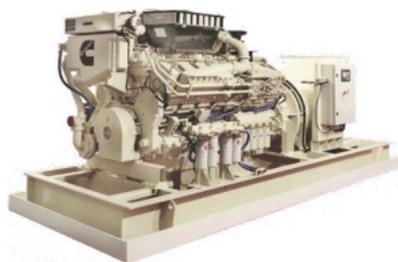

GENERAL SPECIFICATIONS

Engine Model	KTA50-D(M1)
Alternator	STAMFORD PM734E

PRIME POWER RATINGS

				FUEL CONSUMPTION		EMISSIONS		
kWe	kVa	Hz	Voltage	Rated L/hr (Gal/hr)	ISO Avg L/hr (Gal/hr)	IMO	EPA	EU
KC- and HX-cooled ratings								
1004	1255	50	380	224.5 (64.6)	141.9 (37.5)	2	—	—
1050	1255	50	400	224.5 (64.6)	141.9 (37.5)	2	—	—
			440					
1184	1480	60	416	290.7 (76.8)	169.6 (44.8)	2	—	—
			440					
1230	1538	60	460	290.7 (76.8)	290.7 (76.8)	2	—	—
			480					

Ratings below 130 kW are not subject to IMO emission regulations.

For more information on average fuel consumption and emissions, refer to the Reference Materials section.

PRODUCT DIMENSIONS

		KC AND HX CONFIGURATIONS	
Length	mm (in)	5150	(203)
Width	mm (in)	1900	(75)
Height	mm (in)	2100	(83)
Weight	kg (lb)	9700	(21384)

Dimensions may vary based on selected engine configuration.